


重载传动用弯板链 Heavy-Duty Crank-Link Drive Chains

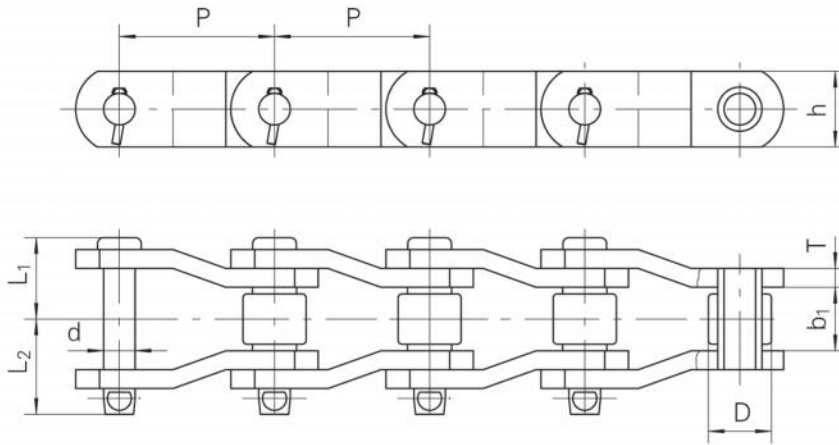

Properties
 TH Thru-Hardened
 CARB Carburized
 SIH Selectively Induction Hardened

链号		节距	窄端内宽	销轴				链板		滚子		最小抗拉强度	每米重量
HS Chain No.	ISO Chain No.	Pitch	Inner Width at the narrow end	Pin				Sidebar		Roller		Ultimate Tensile Strength	Weight per Meter
		P	b(min)	d	L ₁	L ₂	Properties	h	T	D(max)	Properties	Fu(min)	q
		mm	mm	mm	mm	mm		mm	mm	mm		kN	kg/m
HS 2570	2010	63.5	37.9	15.88	41.9	46.2	TH	44.5	8	31.75	CARB	254	13.1
HS 3067	2512	77.9	39	19.05	46.1	53.5	TH	50.8	9.5	41.4	TH	300	18.1
HS 2512A		77.9	39	20.32	47	56	TH	54	9.5	41.4	TH	300	18.7
HS 1568		77.9	38.61	19.05	46.1	52.5	SIH	57.15	9.5	41.27	TH	360	20.2
HS 1037		78.1	36.83	16.51	44.9	49.3	SIH	44.45	9.5	31.75	TH	270	13.9
HS I3P		78.1	37.5	16.5	45.5	50.9	TH	39.6	9.5	31.75	TH	330	12.4
HS 1190		78.1	37.5	16.5	45.5	50.9	TH	44.45	9.5	31.75	TH	330	13.3
HS2814	2814	88.9	38.1	22.23	53.6	62	TH	60.5	12.7	44.45	TH	516	25.3
HS 6214		101.6	68.66	31.55	68	76.9	SIH	69.85	12.7	57.15	TH	480	37.6
HS 1240		103.2	48	22.1	58.1	65.9	SIH	50.8	12.7	44.45	TH	209	21.4
HS 1244		103.2	48	22.1	58.1	67.5	SIH	54	12.7	44.45	TH	400	22.4
HS I4P		103.2	50.8	22.23	60.2	67.5	TH	57.2	12.7	44.45	TH	666.8	23.8
HS3315	3315	103.45	47.63	23.8	62.9	71.4	TH	60.3	14.3	45.23	TH	560	27.8
HS 1245	SIH						560					28.4	
HS 4073		103.45	48.8	25.4	62.8	70.3	TH	60.3	14.3	45.21	TH	755.7	27.8
HS 4522	3618	114.3	52.3	27.94	63.8	72.2	TH	79.2	14.3	57.15	TH	760	38.1
HS 635		114.3	50.8	27.94	62.6	71.7	SIH	76.2	14.3	57.15	TH	740	37.4
HS4523		118.11	52.3	27.94	67.2	75.6	TH	82.6	16	57.15	TH	850	41.9
HS5027	4020	127	69.4	31.75	78.5	84.5	TH	88.9	15.9	63.5	TH	1156	51.3
HS 1306	4824	152.4	74.6	37.9	85.2	97	SIH	101.6	19.05	76.2	TH	1400	69.1
HS1030		78.1	36.83	15.75	41.4	46.8	CARB	38.1	8	32	TH	109	10.4
HS1207		127	68.25	31.55	74.1	78.1	SIH	88.9	15.9	63.5	TH	990	51.18
HS238		88.7	36.83	22.1	52.65	54.65	SIH	57.2	12.7	44.45	TH	400	22.88