


# 钢制直输平顶链

## Steel Straight Run Flat-Top Chains

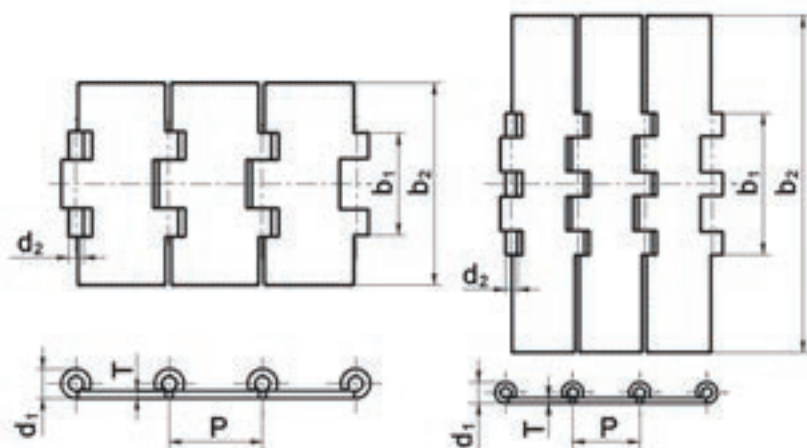

链号 Chain No.	节距 Pitch P mm	链板 宽度 Slat width $b_2$ mm	固定铰卷 外跨宽 Width over fixed curls $b_1$ mm	销轴 直径 Pin diameter $d_2$ mm	链板 厚度 Slat thickness T mm	铰卷 外径 Curl outside diameter $d_1$ (max) mm	最小抗拉强度 Ultimate tensile Strength		每米净重 Weight per meter q kg/m
							300系列 300 series Q(min) kN	400系列 400 series Q(min) kN	

### 标准系列 Standard series

单铰链 Single hinge	C12S	38.1	76.2	42	6.35	3.1	13.13	8.00	6.25	2.39
	C13S		82.6(82)							2.55
	C14S		88.9							2.70
	C16S		101.6							2.99
	C18S		114.3							3.29
	C20S		127.0							3.59
	C24S		152.4							4.17
	C30S		190.5							5.06
双铰链 Double hinge	C30D		190.5	80.5				16.00	12.50	5.87

### 衍生系列 Derived series

单铰链 Single hinge	25.4-CS54	25.4	54.5	42	6.35	3.1	13.13	8.00	6.25	2.26
	25.4-CS63		63.0	41.8						2.55
	25.4-CS71		71.5							2.79
	25.4-CS75		75.0							2.87
	25.4-CS82		82.0							2.94
	25.4-CS88		88.0							3.08
	25.4-CS98		98.0	42						3.30
	36-CS80		36	80.0						
	36-CS90	90.0			2.79					
	38.1-CS53	38.1	53.0		2.04					
	38.1-CS65		65.0		2.32					