
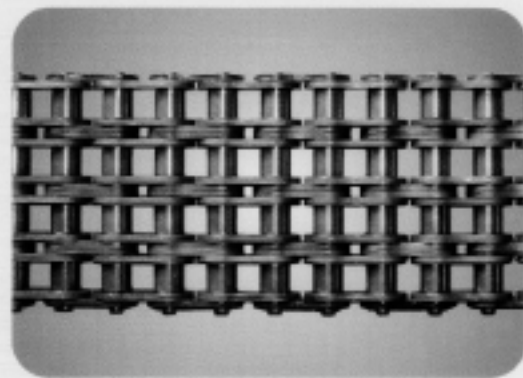


# 石油钻机链

## Oilfield Chains

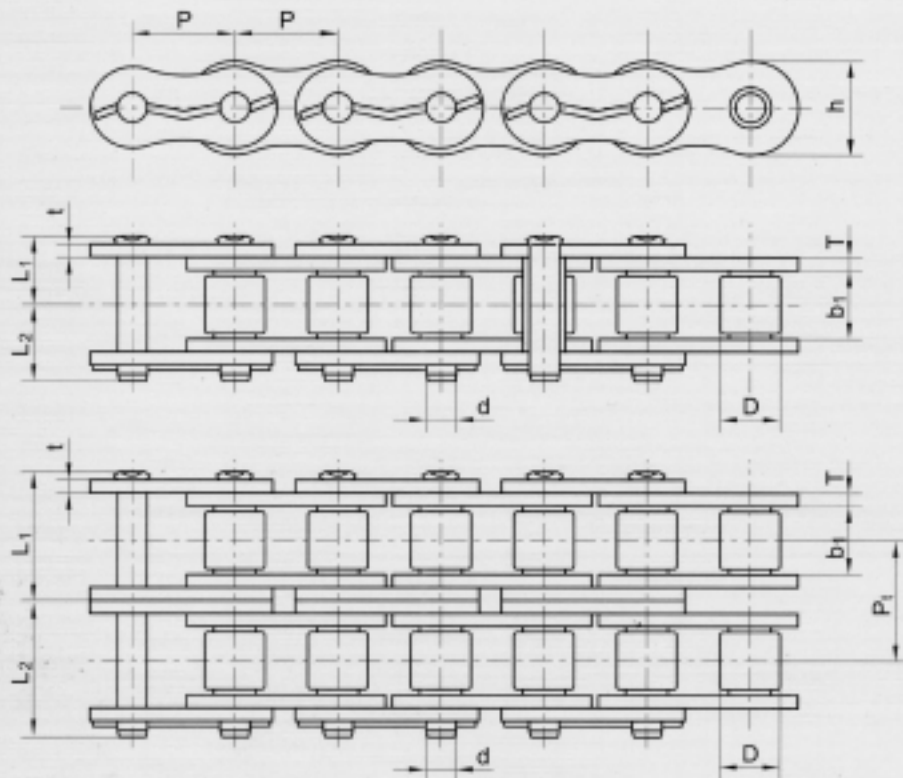

链号 Chain No.	节距 Pitch P mm	内节内宽 Width between inner plates $b_1$ (min) mm	滚子 外径 Roller diameter D (max) mm	销轴 Pin			链板 Plate		排距 Transverse pitch $P_1$ mm	最小抗拉 强度 Ultimate tensile strength $Q_{min}$ kN	平均拉 伸强度 Average tensile strength $Q_0$ kN	每米净重 Weight per meter $q$ kg/m
				d mm	$L_1$ mm	$L_2$ mm	h mm	t/T mm				
16S-1	25.4	15.75	15.88	7.92	16.4	18.5	24	3.2	/	55.6	65.1	2.807
16S-2	25.4	15.75	15.88	7.92	31.05	33.15	24	3.2	29.29	111.2	130.1	5.543
16S-3	25.4	15.75	15.88	7.92	45.7	47.8	24	3.2	29.29	166.8	195.2	8.279
16S-4	25.4	15.75	15.88	7.92	60.35	62.45	24	3.2	29.29	222.4	260.2	11.015
16S-5	25.4	15.75	15.88	7.92	75	77.1	24	3.2	29.29	278.0	325.3	13.75
16S-6	25.4	15.75	15.88	7.92	89.6	91.7	24	3.2	29.29	333.6	390.3	16.485
16S-8	25.4	15.75	15.88	7.92	118.9	121	24	3.2	29.29	444.8	520.4	21.957
20S-1	31.75	18.9	19.05	9.52	20.1	24.2	30	4	/	86.74	93.7	4.214
20S-2	31.75	18.9	19.05	9.52	38	42.1	30	4	35.76	173.48	187.4	8.302
20S-3	31.75	18.9	19.05	9.52	55.85	59.95	30	4	35.76	260.22	281.0	12.387
20S-4	31.75	18.9	19.05	9.52	73.75	77.85	30	4	35.76	346.96	374.7	16.474
20S-5	31.75	18.9	19.05	9.52	91.6	95.7	30	4	35.76	433.7	468.4	20.56
20S-6	31.75	18.9	19.05	9.52	109.5	113.6	30	4	35.76	520.44	562.1	24.647
20S-8	31.75	18.9	19.05	9.52	145.25	149.35	30	4	35.76	693.92	749.4	32.82