


CA系列农用滚子链

CA Series Agricultural Roller Chains

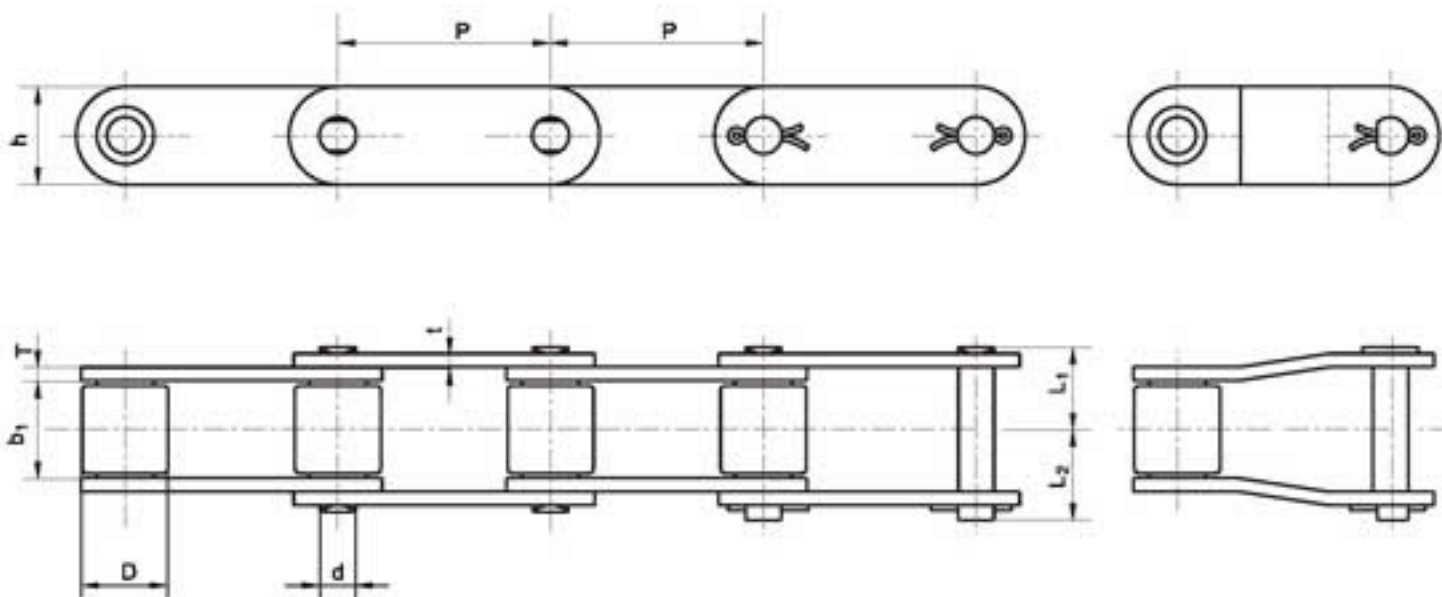

链号 Chain No.	节距 Pitch P mm	内节内宽 Width between inner plates b ₁ (min) mm	滚子 外径 Roller diameter D (max) mm	销轴 Pin			链板 Plate		最小抗拉 强度 Ultimate tensile strength Q _{min} kN	平均拉 伸强度 Average tensile strength Q ₀ kN	每米净重 Weight per meter q kg/m
				d mm	L ₁ mm	L ₂ mm	h mm	T mm			
*CA550	41.4	20.1	16.7	7.16	17.25	20.05	19.05	2.62	39.1	48.5	1.93
CA550/45	41.4	20.1	15.24	7.16	17.25	20.05	19.05	2.62	39.1	48.5	1.78
CA550/55	41.4	20.1	17.78	7.16	17.25	20.05	19.05	2.62	39.1	48.5	2.03
CA550/S55	41.4	21.9	17.78	7.16	18.15	20.95	19.05	2.62	39.1	48.5	2.09
CA550H	41.4	20.1	16.7	7.16	18.15	20.95	19.05	3	45	54.5	2.05
CA550V	41.4	19.05	16.7	8.28	17.65	20.65	20	3	50	58	2.01
CA557	41.4	20.1	17.8	7.92	18.55	21.15	23.1	3.2	55.6	70	2.56
CA645Z	41.4	22.2	17.78	8.28	21.2	23.9	21.2	4	52.9	73.5	2.93
CA624	38.4	19.05	15.88	8.28	17.65	20.65	20.5	3	52.9	60	2.14
*CA620	42.01	24.51	17.91	7.16	20.75	23.45	19.05	3.2	39.1	55	2.44

*链条零部件有碳钢和不锈钢两种材质

* Chains: There are two kinds of materials for their component parts, which are carbon steel and stainless steel.