



目录 CONTENTS

沼泽地装备用链 Marsh Buggy Chain


沼泽地装备驱动链

Marsh Buggy Track Chain..... 1-2

沼泽地装备用链 Marsh Buggy Chain




沼泽地装备驱动链 Marsh Buggy Track Chain

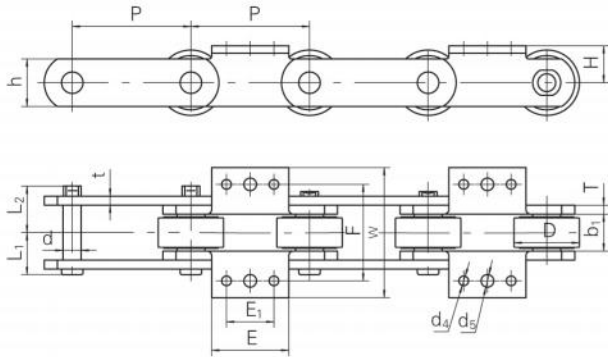

链号	F	W	E ₁	E	d ₄	d ₅	H
Chain No.	mm	mm	mm	mm	mm	mm	mm
US76.2-K3	77.6	101.6	35	57.5	9.8	9.8	33.2
US127-K3	103.4	139.4	50.8	82.6	10.3	13.5	39.6


链号	节距	内节内宽	滚子外径	销轴			链板		最小抗拉强度	每米重量
				Pin			Sidebar		Ultimate tensile strength	Weight per meter
				P	b ₁ (min)	D(max)	d	L ₁	L ₂	h
Chain No.	Pitch	Width between inner sidebars	Roller diameter	d	L ₁	L ₂	h	t/T	Ultimate tensile strength	Weight per meter
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
US76.2-K3	76.2	25.5	50.8	11.1	28.9	32.9	38.1	6.4	180	12.4
US127-K3	127	38.4	69.85	19	44.5	52	50.8	9.6	353	21.6

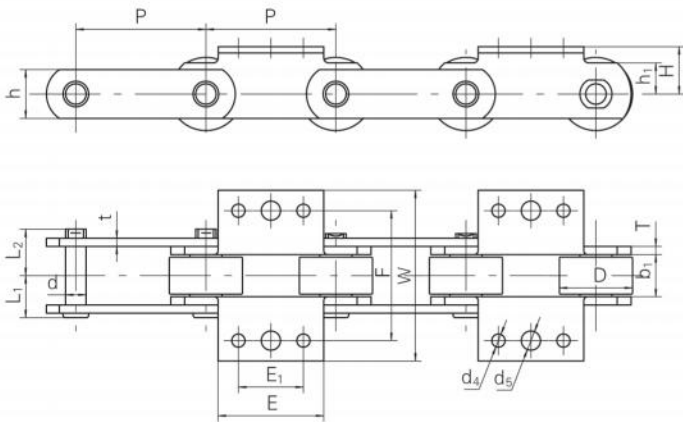

F	W	E ₁	E	d ₄	d ₅	H
mm	mm	mm	mm	mm	mm	mm
101.6	133.6	50.8	82.6	10.3	15	36


链号	节距	内节内宽	滚子外径	销轴			链板			最小抗拉强度	每米重量	
				Pin			Sidebar			Ultimate Tensile strength	Weight per meter	
				P	b ₁ (min)	D(max)	d	L ₁	L ₂	h	h ₁	t/T
Chain No.	Pitch	Width between inner sidebars	Roller diameter	d	L ₁	L ₂	h	h ₁	t/T	Ultimate Tensile strength	Weight per meter	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
US101.6-K3	101.6	31.8	57.15	15.88	33.8	39	38.1	44.4	6.4	240	14.2	

沼泽地装备驱动链 Marsh Buggy Track Chain

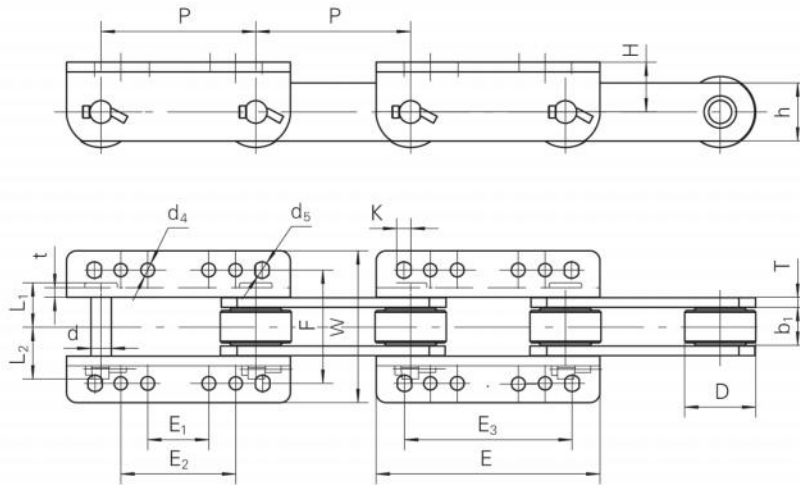

F	W	d ₄	d ₅	K	E ₁	E ₂	E ₃	E	H
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
110	150	13.5	16	14	60	113	165	221	49

链号	节距	内节内宽	滚子外径	销轴			链板		最小抗拉强度	每米重量
Chain No.	Pitch	Width between inner sidebars	Roller diameter	Pin			Sidebar		Ultimate tensile strength	Weight per meter
	P	b ₁ (min)	D(max)	d	L ₁	L ₂	h	t/T	Fu(min)	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
HZ09060-K6	152.4	37.7	69.85	18.9	43.4	51.8	50.8	9.5	266.6	22.2

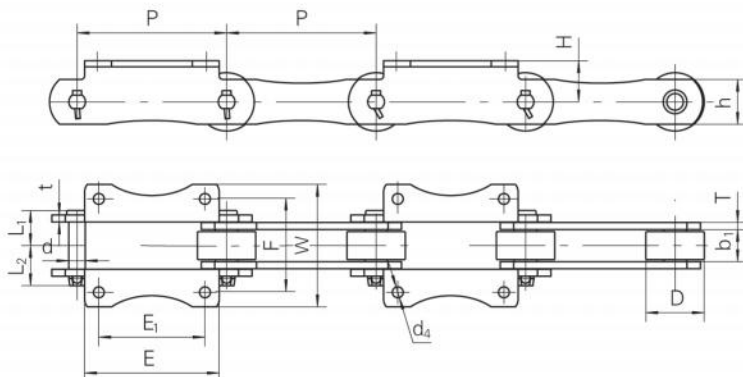

F	W	d ₄	E ₁	E	H
mm	mm	mm	mm	mm	mm
120	158	13	146	180	55

链号	节距	内节内宽	滚子外径	销轴			链板		最小抗拉强度	每米重量
Chain No.	Pitch	Width between inner sidebars	Roller diameter	Pin			Sidebar		Ultimate tensile strength	Weight per meter
	P	b ₁ (min)	D(max)	d	L ₁	L ₂	h	t/T	Fu(min)	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
25200-K2	200	40.8	78	22.23	46.5	53.5	60	9.5	450	22.3